

Beamever

NOVA TAPE IP54

Dot-free, flexible,
cuttable and dimmable tape.
Pre-wired tape, simple and
quick installation.
Easy to mount on smooth
surfaces thanks to high quality
3M tape at the back.

One BIN Only to ensure perfect
color consistency



Beamever




NOVA TAPE IP54

- Almost dot-free itself, which offer you great freedom of choosing profile.
- IP54 protection thanks to high quality silicone heat shrinkable sleeve.
- Wide color temperature range for your option.
- Long lifespan and excellent in heat dissipation.
- Use COB chips in One BIN Only to ensure perfect color consistency.
- High CRI90 to present real color, CRI80 is optional to meet your different needs.

Product Benefits:

- Flexible, cuttable and dimmable LED strip.
- Easy to mount on smooth surfaces thanks to high quality 3M tape at the back.
- Pre-wired LED strip, simple and quick connection.

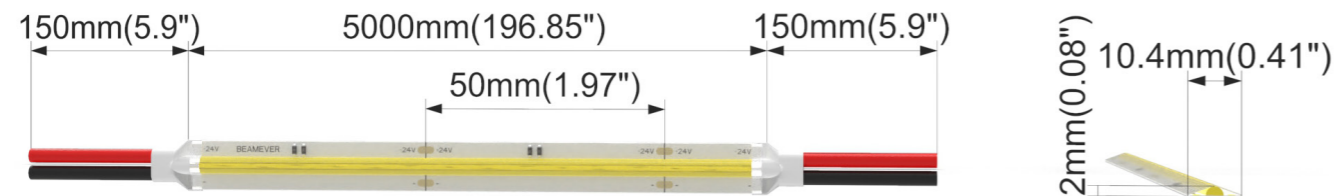


Electrical data

Voltage	DC24V (23.5V _{min} 24.5V _{max})
LED PIN Temperature	Max. 60.9°C /141.6°F
Storage Temperature	-25°C /-13°F _{min} 60°C /140°F _{max}
Lumen Efficiency	110lm/w(4000K)
SDCM	3 (2700K, 3000K, 4000K)
Ra	Ra90; Ra80 optional
Max Current/LED	26mA
Unit Cut	50mm
Waterproof Rate	IP54
Warranty	5 Years



LM/M	5W	10W	15W
2700K	460	920	1350
3000K	515	960	1440
3500K	530	990	1480
4000K	580	1100	1550
6500K	560	1050	1600
Max. Run Length(M)	5	5	5

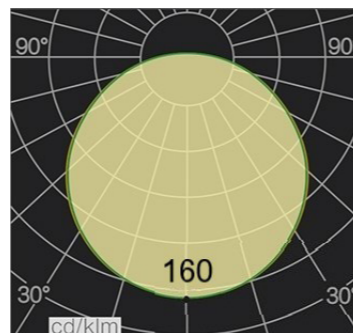

Important notice

-The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.



Order code

SERIES NAME	COLOR	LENGTH	POWER
NOVA TAPE IP54	27= 2700K	05000=5M/196.85"	050=5W
	30= 3000K		100=10W
	35= 3500K		150=15W
	40=4000K		
	65=6500K		


Eg1:
NOVA TAPE IP54-27-05000-050:
NOVA TAPE IP54, 2700K, 5M/reel,
5W/m.

Eg2:
NOVA TAPE IP54-30-05000-100:
NOVA TAPE IP54, 3000K, 5M/reel,
10W/m.

Accessories

Art.#	Description	Picture	Art.#	Description	Picture
MF001	Male and Female connector, IP20		XLG-150-24-A	PSU 24V/150W IP67, Non-dimmable, White, 100-305V supply	
MF002	Male and Female DC connector, IP44		ELG-150-24B	PSU 24V/150W IP67, 3 in 1 dimming function, White, 100-305V supply	
T0001	VHB 3M adhesive tape		ELG-150-24DA	PSU 24V/150W IP67, DALI control technology, White, 100-305V supply	

Wiring connection

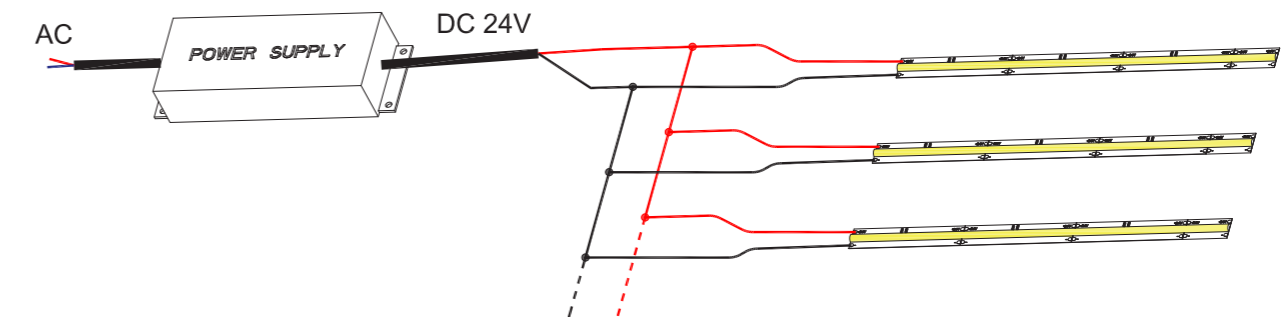

Application



Where to use the product?

It can offer you eye-catching homogeneous and dot-free light itself, even though you don't put it in aluminium profile. In addition, its excellent flexibility and cuttability leaves you free to follow your light inspiration and create all kinds of shaped lighting with ease.

It is a perfect linear lighting solution for indoor and wet applications like Kitchen, bathroom, offices, corridors and residential, shopping mall interiors....all in all, almost all interiors and wet areas can be lighted up and beautified by creating stylish lighting.



+24V

-

+24V

-

Beamever

Address: 100 N Howard St Ste R,
Spokane, WA, 99201-0508 USA

Tel: 323-5104660

info@beamever.com

www.beamever.com