

C

S

C



ΑΙΤΑ ΤΑΡΕ

Flexible, cuttable and dimmable tape. Pre-wired tape, simple and quick installation. Easy to mount on smooth surfaces thanks to high quality 3M tape at the back.

One BIN Only to ensure perfect color consistency









ΑΙΤΑ ΤΑΡΕ

- -High lumen efficiency, up to 150lm/w Ra90 to achieve energy saving.
- -With 160 high quality LEDS per meter and a width of 10mm. -Wide color temperature range for your option.
- -Long lifespan and excellent in heat dissipation.
- -Use SDMC3 2835 LEDs in One BIN Only to ensure perfect color consistency.
- -High CRI90 to present real color, CRI80 is optional to meet your different needs.

Product Benefits:

- -Flexible, cuttable and dimmable LED strip.
- -Easy to mount on smooth surfaces thanks to high quality 3M tape at the back.
- -Pre-wired LED strip, simple and quick installation.



Electrical data

Voltage	DC24V (23.5V _{min} , 24.5V _{max})	
LED PIN Temperature	Max. 60.9°C /141.6°F	
Storage Temperature	-25°C /-13°F _{min} , 60°C /140°F _{max}	
Lumen Efficiency	150lm/w(4000K)	
SDCM	3 (2700K, 3000K, 4000K)	
Ra	Ra90; Ra80 optional	
Max Current/LED	43.7mA	
Unit Cut	50mm	
Waterproof Rate	IP20	
Warranty	5 Years	

LM/M	4.8W	9.6W	14.4W	19.2W	21W
2700K	652	1382	1996	2794	2998
3000K	670	1390	2008	2819	3009
3500K	690	1420	2106	2850	3136
4000K	721	1441	2168	2890	3160
6500K	731	1475	2190	2902	3215
Max. Run Length(M)	5	5	5	5	5

160

Life span> 54000H

One Bin Only

F

ndooi

Important notice

-The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.




Order code

_			
	SERIES NAME	COLOR	LENGTH
	ALTA TAPE	27= 2700K	05000=5M/196.85"
		30= 3000K	
		35= 3500K	
		40=4000K	
		65=6500K	

Accessories

Art.#	Description	Picture	Art.#	Description	Picture
C0009	Connector for Strip to strip connection, IP20tion.		T0001	VHB 3M adhesive tape	
C0010	Connector for Strip to cable connection, IP20		XLG-150- 24-A	PSU 24V/150W IP67, Non- dimmable, White, 100-305V supply	
MF001	Male and Female connector, IP20		ELG-150- 24B	PSU 24V/150W IP67, 3 in 1 dimming function, White, 100- 305V supply	
MF002	Male and Female DC connector, IP44	-	ELG-150- 24DA	PSU 24V/150W IP67, DALI control technology, White, 100- 305V supply	ATTEN.

Wiring connection

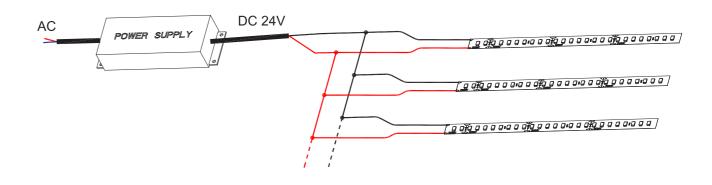

Application



Where to use the product? It can achieve fantastic lighting effects and bring bright light, effectively and elegantly highlighting certain areas with charming lighting and bringing your project to light. Its excellent flexibility and cuttability offer many possibilities and great freedom of design. Full color range to meet your different lighting needs.

same time.

POWER
048=4.8W
096=9.6W
144=14.4W
192=19.2W
210=21W

Eg1: ALTA TAPE-27-05000-048: ALTA TAPE, 2700K, 5M/reel, 4.8W/m.

Eg2: ALTA TAPE-30-05000-096: ALTA TAPE, 3000K, 5M/reel, 9.6W/m.

It is an ideal indoor lighting option for offices, corridors and residential, shopping mall interiors....all in all, almost all interiors can be lighted up and beautified by creating stylish lighting effects which can brighten your world and mood at the

Beamever

Address: 100 N Howard St Ste R, Spokane, WA, 99201-0508 USA Tel: 323-5104660 info@beamever.com www.beamever.com