



NOVA TAPE S

Dot-free, flexible, cuttable and dimmable tape. Pre-wired tape, simple and quick installation. Easy to mount on smooth surfaces thanks to high quality 3M tape at the back.

One BIN Only to ensure perfect color consistency




NOVA TAPE S

- Slim size in 4mm width, perfect solution for narrow lighting
- Almost dot-free itself, which offer you great freedom of choosing profile.
- Wide color temperature range for your option.
- Long lifespan and excellent in heat dissipation.
- Use COB chips in One BIN Only to ensure perfect color consistency.
- High CRI90 to present real color, CRI80 is optional to meet your different needs.


Product Benefits:

- Flexible, cuttable and dimmable LED strip.
- Easy to mount on smooth surfaces thanks to high quality 3M tape at the back.
- Pre-wired LED strip, simple and quick connection.

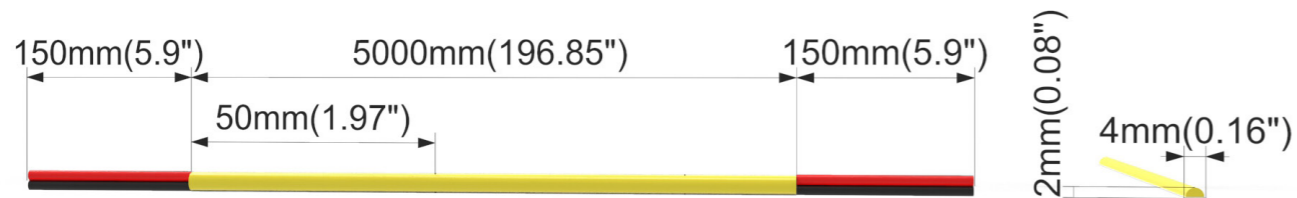


Electrical data

Voltage	DC24V (23.5V _{min} 24.5V _{max})
LED PIN Temperature	Max. 60.9°C /141.6°F
Storage Temperature	-25°C /-13°F _{min} 60°C /140°F _{max}
Lumen Efficiency	115lm/w(4000K)
SDCM	3 (2700K, 3000K, 4000K)
Ra	Ra90; Ra80 optional
Max Current/LED	26mA
Unit Cut	50mm
Waterproof Rate	IP20
Warranty	5 Years

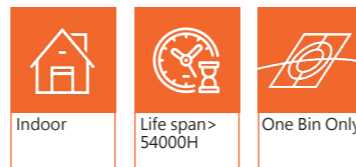

LM/M	5W
2700K	480
3000K	519
3500K	545
4000K	575
6500K	560
Max. Run Length(M)	5

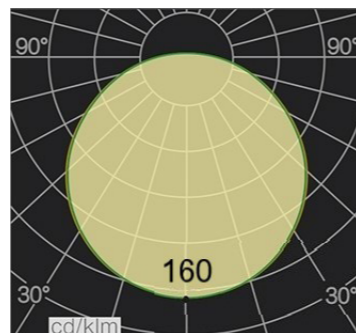

Important notice

-The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.



Order code

SERIES NAME	COLOR	LENGTH	POWER
NOVA TAPE S	27= 2700K	05000=5M/196.85"	050=5W
	30= 3000K		
	35= 3500K		
	40=4000K		
	65=6500K		


Eg1:
NOVA TAPE S-27-05000-050:
NOVA TAPE S, 2700K, 5M/reel,
5W/m.

Eg2:
NOVA TAPE S-30-05000-050:
NOVA TAPE S, 3000K, 5M/reel,
5W/m.

Accessories

Art.#	Description	Picture	Art.#	Description	Picture
MF001	Male and Female connector, IP20		XLG-150-24-A	PSU 24V/150W IP67, Non-dimmable, White, 100-305V supply	
MF002	Male and Female DC connector, IP44		ELG-150-24B	PSU 24V/150W IP67, 3 in 1 dimming function, White, 100-305V supply	
T0001	VHB 3M adhesive tape		ELG-150-24DA	PSU 24V/150W IP67, DALI control technology, White, 100-305V supply	

Wiring connection

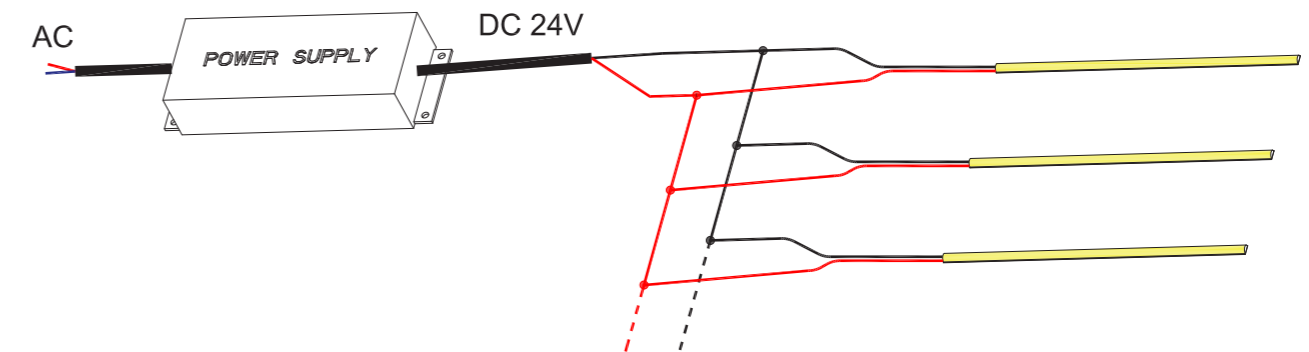

Application



Where to use the product?

It can create eye-catching homogeneous and dot-free light itself, even though you don't put it in aluminium profile. In addition, its excellent flexibility, cuttability and slim size leaves you free to follow your light inspiration and create all kinds of shaped lighting with ease.

It is one of the slimmest linear solutions for interior applications, effectively and elegantly highlighting certain areas with charming lighting for your project. You can use it in offices, corridors, residential-areas, and shopping malls. Try it please and you will find a new world.



Beamever

Address: 100 N Howard St Ste R,
Spokane, WA, 99201-0508 USA

Tel: 323-5104660

info@beamever.com

www.beamever.com