


# Beamever


## NOVA TAPE IP67

Dot-free, flexible,  
cuttable and dimmable tape.  
Pre-wired tape, simple and  
quick installation.  
Easy to mount on smooth  
surfaces thanks to high quality  
3M tape at the back.

One BIN Only to ensure perfect  
color consistency

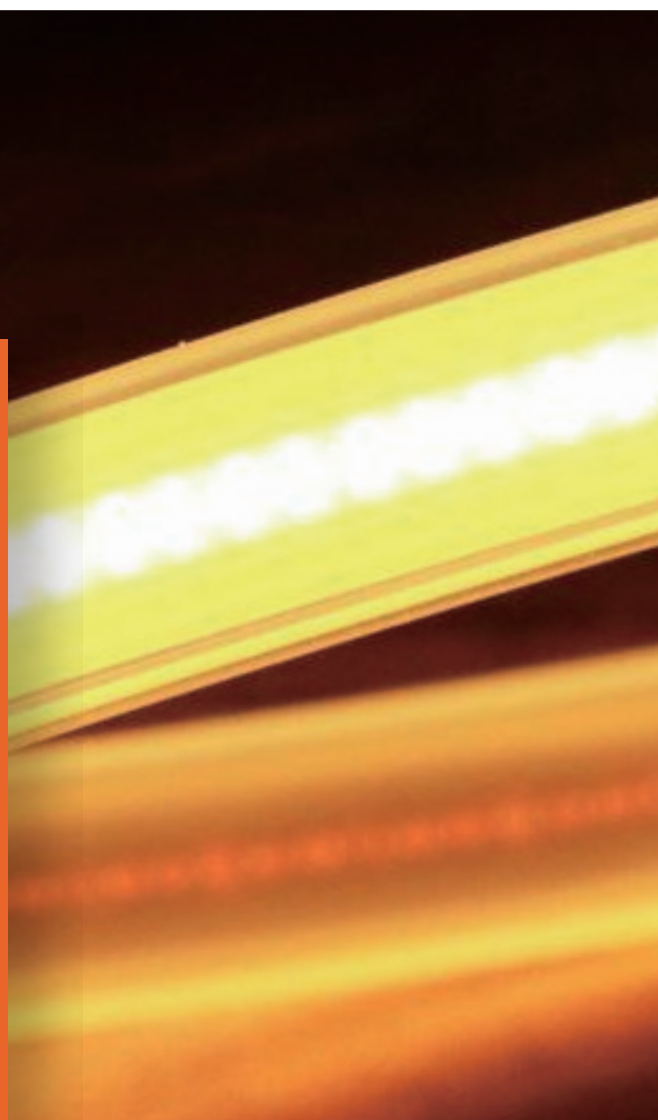

Beamever

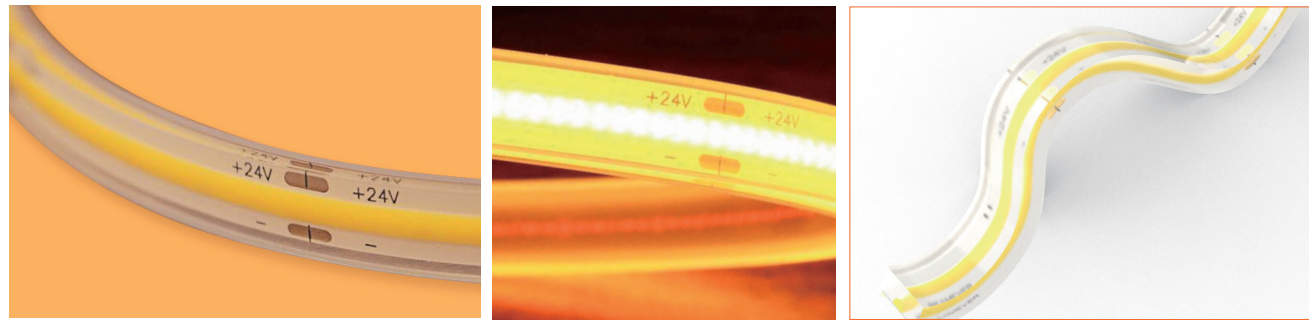


## NOVA TAPE IP67

- Almost dot-free itself, which offer you great freedom of choosing profile.
- IP67 protection with high performance silicone, UV resistant, solvents resistant.
- Wide color temperature range for your option.
- Long lifespan and excellent in heat dissipation.
- Use COB chips in One BIN Only to ensure perfect color consistency.
- High CRI90 to present real color, CRI80 is optional to meet your different needs.


### Product Benefits:

- Homogeneous light effect & high light efficiency.
- Extremely durability and flexibility thanks to high performance materials.
- Not just good-looking but also weatherproof.

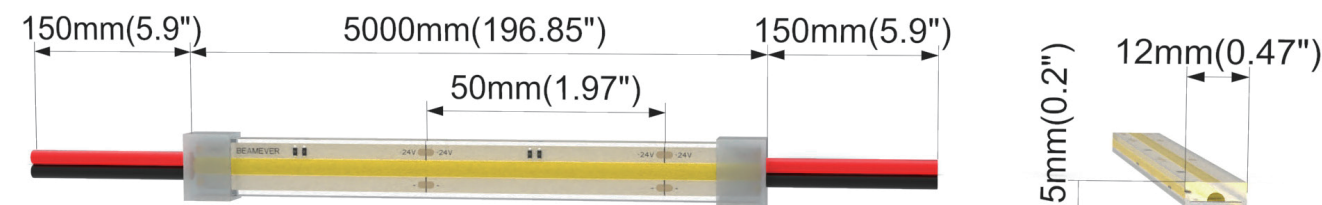


### Electrical data

Voltage	DC24V (23.5V <sub>min</sub> 24.5V <sub>max</sub> )
LED PIN Temperature	Max. 60.9°C /141.6°F
Storage Temperature	-25°C /-13°F <sub>min</sub> 60°C /140°F <sub>max</sub>
Lumen Efficiency	100lm/w(4000K)
SDCM	3 ( 2700K, 3000K, 4000K)
Ra	Ra90; Ra80 optional
Max Current/LED	26mA
Unit Cut	50mm
Waterproof Rate	IP67
Warranty	5 Years

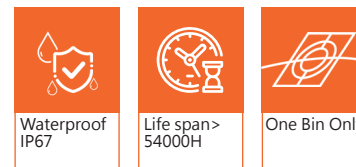

LM/M	5W	10W	15W
2700K	440	870	1250
3000K	470	920	1350
3500K	490	980	1400
4000K	520	1030	1470
6500K	510	1020	1460
Max. Run Length(M)	5	5	5

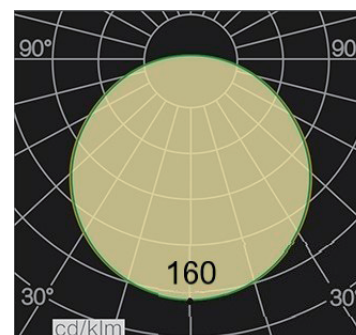

### Important notice

-The given data are typical values due to the tolerances of the production process and the electrical components, values for light output and electrical power can vary up to 10%.



### Order code

SERIES NAME	COLOR	LENGTH	POWER
NOVA TAPE IP67	27= 2700K	05000=5M/196.85"	050=5W
	30= 3000K		100=10W
	35= 3500K		150=15W
	40=4000K		
	65=6500K		


Eg1:  
NOVA TAPE IP67-27-05000-050:  
NOVA TAPE IP67, 2700K, 5M/reel,  
5W/m.

Eg2:  
NOVA TAPE IP67-30-05000-100:  
NOVA TAPE IP67, 3000K, 5M/reel,  
10W/m.


### Accessories

Art.#	Description	Picture	Art.#	Description	Picture
E0001	End cap with 30cm cable 2PIN		T0001	VHB 3M adhesive tape	
M0001	Mounting Clip		XLG-150-24-A	PSU 24V/150W IP67, Non-dimmable, White, 100-305V supply	
MF003	Male and Female connector, IP67		ELG-150-24B	PSU 24V/150W IP67, 3 in 1 dimming function, White, 100-305V supply	
G0001	Silicone glue		ELG-150-24DA	PSU 24V/150W IP67, DALI control technology, White, 100-305V supply	

### Wiring connection

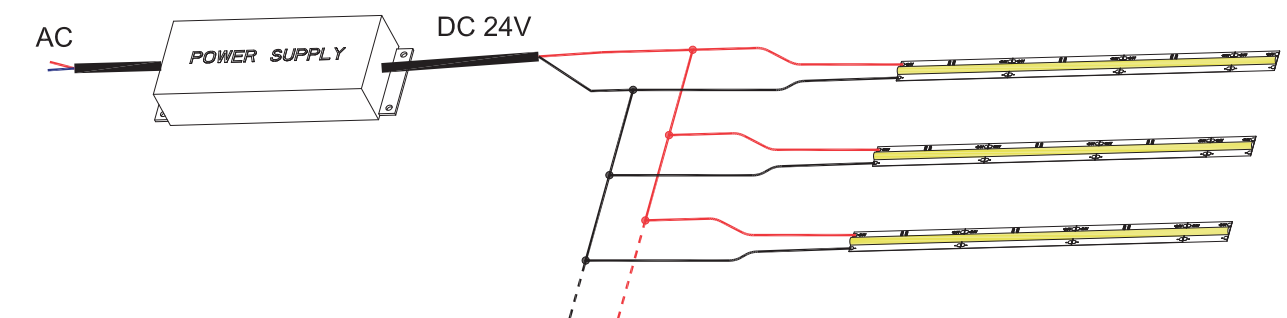

### Application

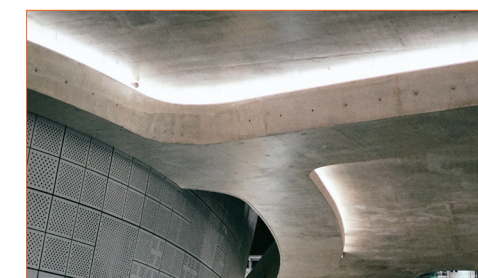

#### Where to use the product?

It can create impressively homogeneous light, effectively and elegantly highlighting certain areas with charming lighting and bringing your project to light. Its excellent flexibility and cuttability offer many possibilities and great freedom of design. Full color range to meet your different lighting needs.

It is an ideal linear option for architectural lighting, facade accent lighting, landscape lighting....all in all, almost any interior or exterior area can be lighted up and beautified by creating stylish lighting effects. Why not bring your project to light with this wonderful product?



VAS+

VAS+

# Beamever

Address: 100 N Howard St Ste R,  
Spokane, WA, 99201-0508 USA  
Tel: 323-5104660  
info@beamever.com  
www.beamever.com