

ANNO TAPE FREE CUT

Indoor · Static White

Features

- Free-Cut design, the ultimate solution of small cut
- Field cuttable & joinable
- Low voltage DC24V
- 700 lumen outputs
- IP20 rated, ideal for indoor uses
- 5 years warranty



Date _____ Fixture type _____

Project name _____ Project phase _____



Dimension



Order Code

Series	Environment		Voltage		Temp./Color		Power		
ANNOFC	D2	Dry (IP20)	24	DC24V	27	2700K	100	10W/M	-700 lm/M
					30	3000K			
					40	4000K			
					65	6500K			

Assembly Builder

Left Feed Entry				Right Feed Entry				Illuminated Length ¹		
F	Front	OW	Open wire 30cm	F	Front	OW	Open wire 30cm	Max.	5m	-10W
C	Closed	MC	Male connector with 20cm cable	C	Closed	MC	Male connector with 20cm cable			
		FC	Female connector with 20cm cable			FC	Female connector with 20cm cable			
		NA	Only for Closed Feed Entry			NA	Only for Closed Feed Entry			

Temp./Color	10W/M
2700K	500
3000K	550
4000K	600
6500K	700
Max. Run Length (M)	5
Storage Temperature	-25-60°C
Ambient Temperature	-20-45°C

Technical Details

Width	8mm (0.31")
PCB Width	8mm (0.31")
LED Quantity	528 LEDs / M (161 LEDs/ft)
Beam Angle	180°
Efficacy	60lm/W @4000K 10W
CRI	Ra ≥ 90
Lumen Maintenance	> 54,000 hours
Max. Length Per Reel	30M (98.4')

Feed Entry Options



Connector Wire Options



OW: Open wire, **Dry only**
Standard 1m (3.28'), 20 AWG
(wire length customizable)

MC: Male connector, **Dry & Damp**
Standard 20cm (0.66'), 20 AWG

FC: Female connector, **Dry & Damp**
Standard 20cm (0.66'), 20 AWG


ANNO TAPE FREE CUT

Indoor · Static White


Channel Compatibility

: No pixelation


Universal

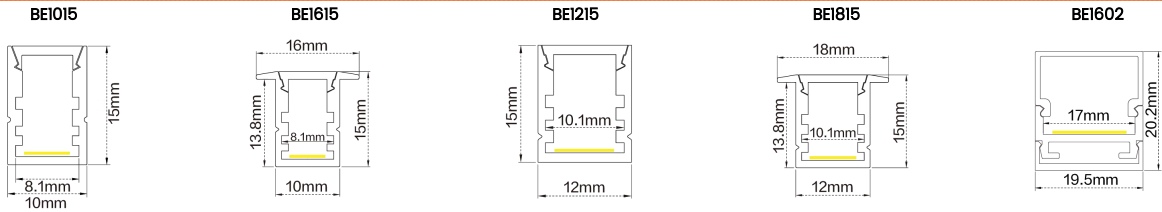


Architectural

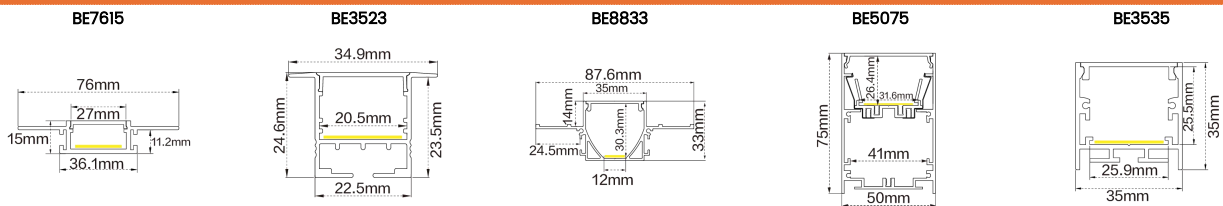


BE5035



Main lighting

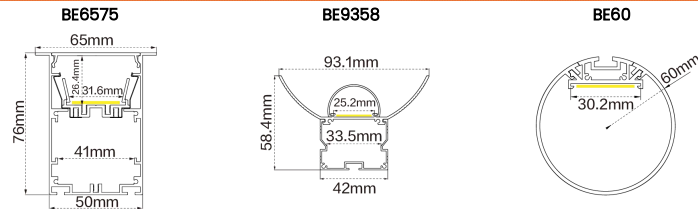


Special lighting

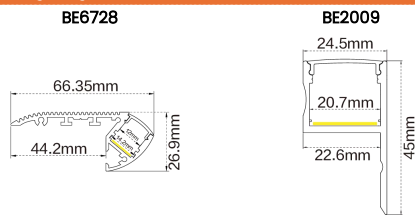

: Slight pixelation

Universal

BE2601



ANNO TAPE FREE CUT


Indoor · Static White

Drivers


Code	Max Load	Input	Output	Dimming	Environment	Size (L*W*H)
XLG-150-24-A	150W	100-305VAC	24VDC	Non-Dim	Dry/Damp/IP67	180 * 63 * 35.5 mm
ELG-150-24B-3Y	150W	100-305VAC	24VDC	3 in 1 dimming	Dry/Damp/IP67	219 * 63 * 35.5 mm
ELG-150-24DA-3Y	150W	100-305VAC	24VDC	DALI control technology	Dry/Damp/IP67	219 * 63 * 35.5 mm
LPV-150-24	150W	100-277VAC	24VDC	Non-Dim	Dry/Damp/IP67	148 * 40 * 30 mm
LRS-150-24	150W	85-132VAC / 170-264VAC	24VDC	Non-Dim	Dry	99 * 97 * 30 mm
PWM-120-24	120W	90-305VAC / 127-431VAC	24VDC	3 in 1 dimming	Dry/Damp/IP67	191 * 63 * 37.5 mm

Wiring Diagram

Non-dimmable

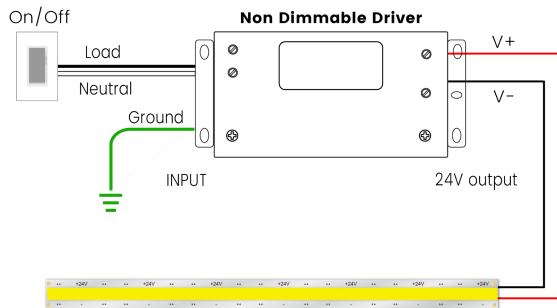

Dimmable

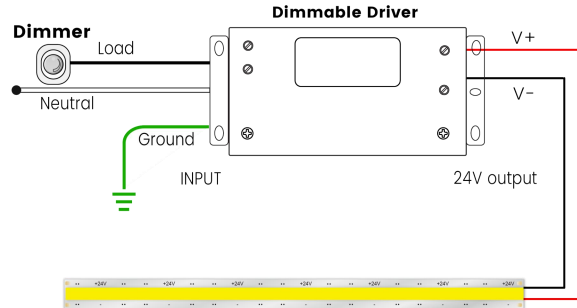

Connectors (Optional, purchase for extra)



N60CO-STCN-2P-8

Strip to cable connector without wire, for 8mm (0.31") tape, 2 pin

N60CO-STC-2P-8

Strip to cable connector with 15cm (5.91") wire, for 8mm (0.31") tape, 2 pin

N60CO-STSJ-2P-8

Strip to strip jumper connector with 15cm (5.91") wire, for 8mm (0.31") tape, 2 pin

N60CO-STDCB-2P-8

Strip to cable with black male & female connector, for 8mm (0.31") tape, 2 pin

N60CO-STDCW-2P-8

Strip to cable with white male & female connector, for 8mm (0.31") tape, 2 pin



NI4CO-ST5-2P-8

Strip to strip connector, for 8mm (0.31") tape, 2 pin

CI4CO-LC-2P-8

L-shaped corner connector, for 8mm (0.31") tape, 2 pin

CI4CO-RC-2P-8

R-shaped corner connector, for 8mm (0.31") tape, 2 pin

NI6CO-L-2P-8

L-shaped connector, for 8mm (0.31") tape, 2 pin

Additional Accessories (Optional, purchase for extra)



MCB-DC-44

Male DC connector with 20cm (0.66') cable, IP44, Dry & damp, 20 AWG

FCB-DC-44

Female DC connector with 20cm (0.66') cable, IP44, Dry & damp, 20 AWG

VHB

VHB 3M adhesive back tape, stronger stickiness