

ANNO TAPE CC

Indoor · Static White

Features

- Max run length up to 20m (65.6ft) from single power feed
- Field cuttable & joinable
- Low voltage DC24V
- 600 lumen outputs
- IP20 rated, ideal for indoor uses
- 5 years warranty



Date


Fixture type

Project name

Project phase



Dimension

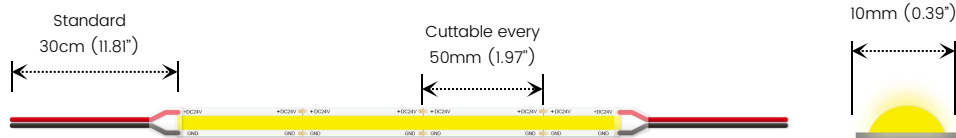

Order Code

Series	Environment	Voltage	Temp./Color	Power
ANNOLR	D2 Dry (IP20)	24 DC24V	27 2700K 30 3000K 40 4000K 65 6500K	070 7W/M -600 lm/M

Assembly Builder

Left Feed Entry				Right Feed Entry				Illuminated Length ¹		
F	Front	OW	Open wire 30cm	F	Front	OW	Open wire 30cm	Max.	20m	-7W
C	Closed	MC	Male connector with 20cm cable	C	Closed	MC	Male connector with 20cm cable	Increment	50mm	
		FC	Female connector with 20cm cable			FC	Female connector with 20cm cable			
		NA	Only for Closed Feed Entry			NA	Only for Closed Feed Entry			

Temp./Color	7W/M
2700K	490
3000K	525
4000K	595
6500K	630
Max. Run Length (M)	20
Storage Temperature	-25~60°C
Ambient Temperature	-20~45°C

Technical Details

Width	10mm (0.39")
PCB Width	10mm (0.39")
LED Quantity	320 LEDs/M (97 LEDs/ft)
Beam Angle	180°
Efficacy	85lm/W @4000K 7W
CRI	Ra≥90
Lumen Maintenance	> 54,000 hours
Max. Length Per Reel	30M (98.4')

Feed Entry Options

F: Front

C: Closed



Connector Wire Options



OW: Open wire, **Dry only**
Standard 1m (3.28'), 20 AWG
(wire length customizable)


MC: Male connector, **Dry & Damp**
Standard 20cm (0.66'), 20 AWG

FC: Female connector, **Dry & Damp**
Standard 20cm (0.66'), 20 AWG

ANNO TAPE CC


Indoor · Static White

Channel Compatibility


: No pixelation

Universal


BEI215




BEI815




BEI415




BE2015




BEI202




BEI201




BEI207




BEI01




BE2020



BEI001




BEI002




Architectural


BE5615




BE7615




BE5315




BE4615




BE5035




BE3535



BE5075




BE8833




Main lighting


BE6575



BE9358



BE60




ANNO TAPE CC


Indoor · Static White

Special lighting

BE6728




BE2009


 : Slight pixelation

Universal

BE2601




Drivers


Code	Max Load	Input	Output	Dimming	Environment	Size (L*W*H)
XLG-150-24-A	150W	100-305VAC	24VDC	Non-Dim	Dry/Damp/IP67	180 * 63 * 35.5 mm
ELG-150-24B-3Y	150W	100-305VAC	24VDC	3 in 1 dimming	Dry/Damp/IP67	219 * 63 * 35.5 mm
ELG-150-24DA-3Y	150W	100-305VAC	24VDC	DALI control technology	Dry/Damp/IP67	219 * 63 * 35.5 mm
LPV-150-24	150W	100-277VAC	24VDC	Non-Dim	Dry/Damp/IP67	148 * 40 * 30 mm
LRS-150-24	150W	85-132VAC / 170-264VAC	24VDC	Non-Dim	Dry	99 * 97 * 30 mm
PWM-120-24	120W	90-305VAC / 127-431VAC	24VDC	3 in 1 dimming	Dry/Damp/IP67	191 * 63 * 37.5 mm

Wiring Diagram

Non-dimmable

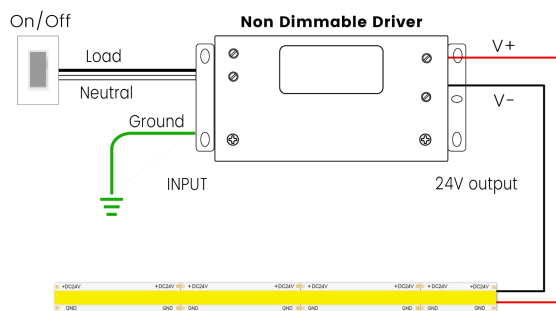

Dimmable

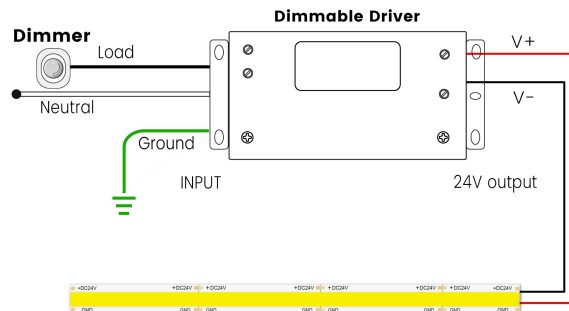

ANNO TAPE CC

Indoor · Static White

Connectors (Optional, purchase for extra)

**NI4CO-STCN-2P-10**

Strip to cable connector without wire, for 10mm (0.39") tape, 2 pin

**NI4CO-STC-2P-10**

Strip to cable connector with 15cm (5.91") wire, for 10mm (0.39") tape, 2 pin

**NI4CO-STSJ-2P-10**

Strip to strip jumper connector with 15cm (5.91") wire, for 10mm (0.39") tape, 2 pin

**NI4CO-STD CB-2P-10**

Strip to cable with black male & female connector, for 10mm (0.39") tape, 2 pin

**NI4CO-STD CW-2P-10**

Strip to cable with white male & female connector, for 10mm (0.39") tape, 2 pin

**NI4CO-ST S-2P-10**

Strip to strip connector, for 10mm (0.39") tape, 2 pin

**CI4CO-LC-2P-10**

L-shaped corner connector, for 10mm (0.39") tape, 2 pin

**CI4CO-RC-2P-10**

R-shaped corner connector, for 10mm (0.39") tape, 2 pin

**NI6CO-L-2P-10**

L-shaped connector, for 10mm (0.39") tape, 2 pin

Additional Accessories (Optional, purchase for extra)

**MCB-DC-44**

Male DC connector with 20cm (0.66') cable, IP44, Dry & damp, 20 AWG

**FCB-DC-44**

Female DC connector with 20cm (0.66') cable, IP44, Dry & damp, 20 AWG

**VHB**

VHB 3M adhesive back tape, stronger stickiness